

JB3.0 40A Level 2 Commercial Charging Station

PRODUCT TECHNICAL SPECIFICATIONS

DESCRIPTION

JB3.0-401A	Single Connector Wall Mount
JB3.0-401B	Single Connector Pedestal Mount
JB3.0-402A	Double Connector Wall Mount
JB3.0-402B	Double Connector Pedestal Mount
JB3.0-WM	Wall Mount Bracket
JB3.0-PD	Pedestal

CERTIFICATIONS

TUV Rheinland Certified Compliance: (Pending)	- 30° C to 55° C
UL 991, 2231-1, 2231-2, 2594 & NEMA 3R	- 22° F to +122° F

AC INPUT

Voltage 208/240 VAC Breaker Rating 50A
 Single Connector: 3 Wire (L1, L2 & G)
 Double Connector: 5 Wire (L1, L1, L2, L2 & G)

OPERATING TEMPERATURE

AC OUTPUT

9.6 kW (240v AC @ 40A)

COMMUNICATIONS

Cellular Modem & Ethernet Standard

PROTOCOL

OCPP 1.6J Multi-Network

DIMENSIONS

72" Total Height with Pedestal	16" Width
36.5" Total Height w/out Pedestal	12" Depth

CONNECTORS

SAE J1772 Connector

CORD LENGTH

18 feet

MATERIALS


Powder Coated Aluminum Enclosure
 Powder Coated Aluminum Wall-Mount Bracket
 Powder Coated Steel Over Stainless Steel Pedestal

CUSTOMIZATION

Branded LED Backlit Door Logo
 Branded Door Skin
 Branded Door Decal
 Powder Coat Color Selection
 GFCI Outlets & E-Bike/E-Scooter Lock Points

USER INTERFACE

Mobile Application
 QR Code
 RFID Card Reader
 LED Indicators

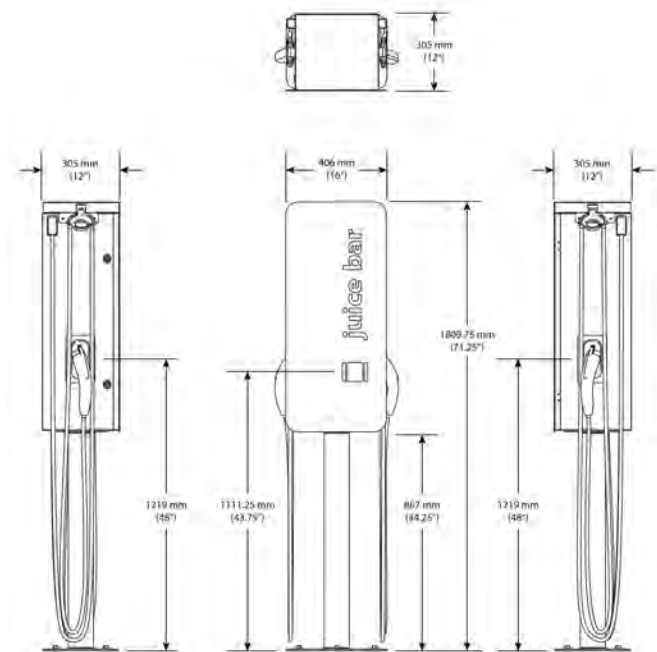

JB3.0 80A Level 2 Commercial Charging Station

PRODUCT TECHNICAL SPECIFICATIONS

DESCRIPTION

JB3.0-801A	Single Connector Wall Mount
JB3.0-801B	Single Connector Pedestal Mount
JB3.0-802B	Double Connector Pedestal Mount
JB3.0-WB	Wall Mount Bracket
JB3.0-PD	Pedestal
JB3.0-PC	Pre-Cast Foundation (Geographically Limited)

CERTIFICATIONS

TUV Rheinland Certified Compliance: (Pending	- 30° C to 55° C
UL 991, 2231-1, 2231-2, 2594 & NEMA 3R	- 22° F to +122° F

AC INPUT

Voltage 208/240 VAC Breaker Rating 100A
 Single Connector: 3 Wire (L1, L2 & G)
 Double Connector: 5 Wire (L1, L1, L2, L2 & G)

OPERATING TEMPERATURE

AC OUTPUT

19.2 kW (240v AC @ 80A)

COMMUNICATIONS

Cellular Modem & Ethernet Standard

PROTOCOL

OCPP 1.6J Multi-Network

DIMENSIONS

72" Total Height with Pedestal	16" Width
36.5" Total Height w/out Pedestal	12" Depth

CONNECTORS

SAE J1772 Connector

CORD LENGTH

10 feet

MATERIALS

Powder Coated Aluminum Enclosure
 Powder Coated Aluminum Wall-Mount Bracket
 Powder Coated Steel Over Stainless Steel Pedestal



CUSTOMIZATION

Branded LED Backlit Door Logo
 Branded Door Skin
 Branded Door Decal
 Powder Coat Color Selection

USER INTERFACE

Mobile Application
 QR Code
 RFID Card Reader
 LED Indicators

GFCI Outlets & E-Bike/E-Scooter Lock Points

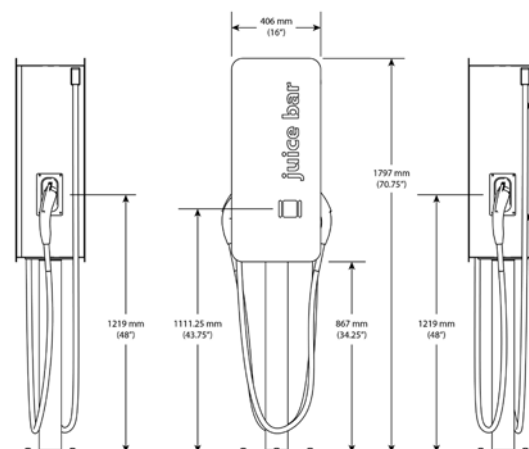

JB3.0 Series Level 2 Commercial Charging Stations

CUSTOMIZATION & ACCESSORIES AVAILABLE

